


Product description **Push-Pull female panel mount connector, Contacts: 3, shieldable, solder, IP67**  
 Area **Push-Pull series 430**  
 Order number **09 4908 081 03**


### Illustration



### Scale drawing



### Contact arrangement



	X	Y
1	-1,55	0,00
2	0,00	1,55
3	1,55	0,00

**You can find the assembly instructions on the next page.**

## Technical data

### General values

Connector design female panel mount connector  
 Connector locking system Push-Pull  
 Termination solder  
 Wire gauge (mm) 0.25 mm<sup>2</sup>  
 Wire gauge (AWG) 24  
 Upper limit temperature 85 °C  
 Lower limit temperature - 40 °C  
 Customs tariff number 85369010  
 Packaging Unit 15

### Electrical values

Rated current (40 °C) 4 A  
 Rated voltage 125 V  
 Rated impulse voltage 1500 V  
 Pollution degree 2  
 Overvoltage category I  
 Insulating material group II  
 EMC compliance shieldable  
 Degree of protection IP67  
 Mechanical operation > 500 Mating cycles


### Material

Contact material CuSn (bronze)  
 Contact plating Au (gold)  
 Contact body material PUR/PA

Product description **Push-Pull female panel mount connector, Contacts: 3, shieldable, solder, IP67**

Area **Push-Pull series 430**  
Order number **09 4908 081 03**

Assembly instructions / Panel cut-out

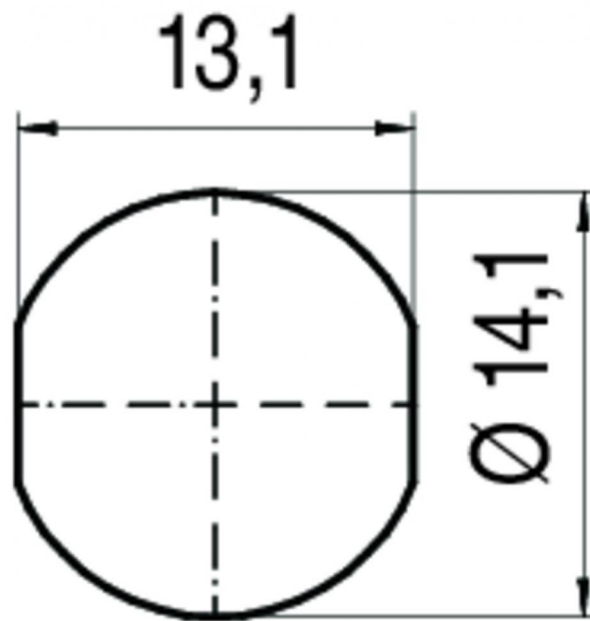

Product description	<b>Push-Pull female panel mount connector, Contacts: 3, shieldable, solder, IP67</b>
Area	<b>Push-Pull series 430</b>
Order number	<b>09 4908 081 03</b>

## Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.